

PRESSIONE bar	PRESSURE psi	PORTATA / CAPACITY ($\pm 5\%$)									
		COME SI ORDINA / HOW TO ORDER									
		75.1818.1 (80015) VERDE GREEN		75.1818.2 (8002) GIALLO YELLOW		75.1818.3 (80025) LILLA LILAC		75.1818.4 (8003) BLU BLUE		75.1818.5 (8004) ROSSO RED	
100 MESH		100 MESH		50 MESH		50 MESH		50 MESH		50 MESH	
l/min	USGal/min	l/min	USGal/min	l/min	USGal/min	l/min	USGal/min	l/min	USGal/min	l/min	USGal/min
3	40	0.60	0.150	0.80	0.200	1.00	0.250	1.20	0.300	1.60	0.400
4	60	0.69	0.180	0.91	0.250	1.15	0.310	1.39	0.370	1.85	0.490
5	70	0.77	0.198	1.03	0.265	1.29	0.331	1.55	0.397	2.07	0.530
6	85	0.85	0.219	1.13	0.292	1.41	0.364	1.70	0.437	2.26	0.583
7	100	0.92	0.237	1.22	0.316	1.53	0.395	1.83	0.474	2.44	0.632
8	115	0.98	0.254	1.31	0.339	1.63	0.424	1.96	0.509	2.61	0.678
9	130	1.04	0.270	1.39	0.361	1.73	0.451	2.08	0.541	2.77	0.721
10	150	1.10	0.290	1.46	0.387	1.83	0.484	2.19	0.581	2.92	0.774
11	160	1.15	0.300	153	0.400	191	0.500	2.30	0.600	3.06	0.800
12	175	1.20	0.314	160	0.418	2.00	0.523	2.40	0.627	3.20	0.836
13	190	1.25	0.327	167	0.436	2.08	0.545	2.50	0.654	3.33	0.871
14	205	1.30	0.340	173	0.453	2.16	0.566	2.58	0.678	3.46	0.905
15	215	1.34	0.348	179	0.464	2.24	0.580	2.68	0.696	3.58	0.927
16	235	1.39	0.364	185	0.485	2.31	0.606	2.77	0.727	3.70	0.969
17	245	1.43	0.371	190	0.495	2.38	0.619	2.86	0.742	3.81	0.989
18	260	1.47	0.382	196	0.510	2.45	0.637	2.94	0.765	3.92	1.020
19	275	1.51	0.393	201	0.524	2.52	0.656	3.02	0.787	4.03	1.048
20	300	1.55	0.411	207	0.548	2.58	0.685	3.10	0.822	4.13	1.095
21	310	1.59	0.418	212	0.557	2.65	0.696	3.17	0.835	4.23	1.114
22	320	1.62	0.424	217	0.566	2.71	0.707	3.25	0.849	4.33	1.131
23	330	1.66	0.431	222	0.574	2.77	0.718	3.32	0.862	4.43	1.149
24	350	1.70	0.444	226	0.592	2.83	0.740	3.39	0.887	4.53	1.182
25	365	1.73	0.453	231	0.604	2.89	0.755	3.46	0.906	4.62	1.207

**CORRISPONDENZA COLORI ATF 80° CON ATR 80°
COLOR MATCHING ATF 80° WITH ATR 80°**

ATR 80°	75.1802.94 GIALLO YELLOW	75.1802.95 ARANCIO ORANGE	75.1802.96 ROSSO RED	75.1802.99 GRIGIO GREY	75.1802.100 NERO BLACK
---------	--------------------------------	---------------------------------	----------------------------	------------------------------	------------------------------

80° spray angle.

ISO standard colour code and flow rate.


Core fits firmly inside the spray tip body.

Wear resistant ceramic internal surfaces.

Use:

fungicide and insecticide applications on air blast sprayers and boom sprayers with nozzle spacing between 35 and 50 cm.

Recommended for multi row spraying (three spray tips on each row), tobacco, orchards, vineyards and cereals.

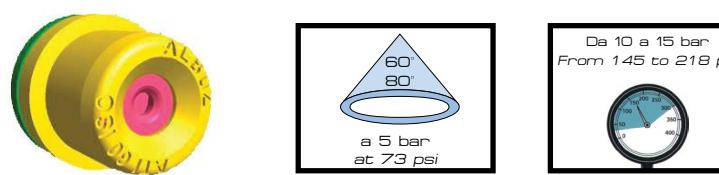

PRESSURE bar PSI	PORTATA / CAPACITY ($\pm 5\%$)																		
	COME SI ORDINA / HOW TO ORDER																		
	75.1817.8 (800050)		75.1817.1 (600075)		75.1817.2 (6001)		75.1817.3 (60015)		75.1817.4 (6002)		75.1817.5 (60025)		75.1817.6 (6003)		75.1817.7 (6004)		75.1817.17 (8005)		
	I/min	USGal min	I/min	USGal min	I/min	USGal min	I/min	USGal min	I/min	USGal min	I/min	USGal min	I/min	USGal min	I/min	USGal min	I/min	USGal min	
5	70	0.26	0.066	0.39	0.099	0.52	0.132	0.77	0.198	1.03	0.265	1.29	0.331	1.55	0.397	2.07	0.530	2.58	0.660
6	85	0.28	0.073	0.42	0.109	0.57	0.146	0.85	0.219	1.13	0.292	1.41	0.364	1.70	0.437	2.26	0.583	2.83	0.730
7	100	0.31	0.079	0.46	0.119	0.61	0.158	0.92	0.237	1.22	0.316	1.53	0.395	1.83	0.474	2.44	0.632	3.06	0.790
8	115	0.33	0.085	0.49	0.127	0.65	0.171	0.98	0.254	1.31	0.339	1.63	0.424	1.96	0.509	2.61	0.678	3.27	0.850
9	130	0.35	0.090	0.52	0.135	0.69	0.181	1.04	0.270	1.39	0.361	1.73	0.451	2.08	0.541	2.77	0.721	3.46	0.900
10	150	0.37	0.097	0.55	0.145	0.73	0.194	1.10	0.290	1.46	0.387	1.83	0.484	2.19	0.581	2.92	0.774	3.65	0.970
11	160	0.38	0.100	0.57	0.150	0.77	0.202	1.15	0.300	1.53	0.400	1.91	0.500	2.30	0.600	3.06	0.800	3.83	1.000
12	175	0.40	0.105	0.60	0.157	0.80	0.210	1.20	0.314	1.60	0.418	2.00	0.523	2.40	0.627	3.20	0.836	4.00	1.050
13	190	0.42	0.109	0.62	0.163	0.83	0.218	1.25	0.327	1.67	0.436	2.08	0.545	2.50	0.654	3.33	0.871	4.16	1.090
14	205	0.43	0.113	0.65	0.170	0.86	0.228	1.30	0.340	1.73	0.453	2.16	0.566	2.59	0.679	3.46	0.905	4.32	1.130
15	215	0.45	0.116	0.67	0.174	0.89	0.232	1.34	0.348	1.79	0.464	2.24	0.580	2.68	0.696	3.58	0.927	4.47	1.160
16	235	0.46	0.121	0.69	0.182	0.92	0.244	1.39	0.364	1.85	0.485	2.31	0.606	2.77	0.727	3.70	0.969	4.62	1.210
17	245	0.48	0.124	0.71	0.186	0.95	0.250	1.43	0.371	1.90	0.495	2.38	0.619	2.86	0.742	3.81	0.989	4.76	1.240
18	260	0.49	0.127	0.73	0.191	0.98	0.255	1.47	0.382	1.96	0.510	2.45	0.637	2.94	0.765	3.92	1.020	4.90	1.270
19	275	0.50	0.131	0.75	0.197	1.01	0.263	1.51	0.393	2.01	0.524	2.52	0.656	3.02	0.787	4.03	1.048	5.03	1.310
20	300	0.52	0.137	0.77	0.205	1.03	0.274	1.55	0.411	2.07	0.548	2.58	0.685	3.10	0.822	4.13	1.095	5.16	1.370
21	310	0.53	0.139	0.79	0.209	1.06	0.281	1.59	0.418	2.12	0.557	2.65	0.696	3.17	0.835	4.23	1.114	5.29	1.400
22	320	0.54	0.141	0.81	0.212	1.08	0.287	1.62	0.424	2.17	0.566	2.71	0.707	3.25	0.849	4.33	1.131	5.41	1.410
23	330	0.55	0.144	0.83	0.215	1.11	0.294	1.66	0.431	2.22	0.574	2.77	0.718	3.32	0.862	4.43	1.149	5.53	1.430
24	350	0.57	0.148	0.85	0.222	1.13	0.300	1.70	0.444	2.26	0.592	2.83	0.740	3.39	0.887	4.53	1.182	5.65	1.480
25	365	0.58	0.151	0.87	0.227	1.15	0.306	1.73	0.453	2.31	0.604	2.89	0.755	3.46	0.906	4.62	1.207	5.77	1.510
CORRISPONDENZA COLORI ATI 60° / 80° CON ATR 60° / 80° - COLOR MATCHING ATI 60° / 80° WITH ATR 60° / 80°																			
ATR 60° ATR 80°	75.1802.91 BIANCO WHITE	75.1816.4 75.1802.92 LILLA LILAC	75.1816.1 75.1802.93 MARRONE BROWN	75.1816.2 75.1802.94 GIALLO YELLOW	75.1816.3 75.1802.95 ARANCIO ORANGE	75.1816.5 75.1802.96 ROSSO RED	75.1816.6 75.1802.99 GRIGIO GREY	75.1816.8 75.1802.100 NERO BLACK	75.1802.98 BLU BLUE										



The diagram illustrates the ALBUZ ATR spray tips. It shows two tips: one with a yellow core labeled '09' and another with a green core labeled '09'. A callout indicates that the green core identifies the 60° spray angle. Another callout indicates that the grey core identifies the 80° spray angle. To the right, a diagram shows a hollow cone with a 60° or 80° angle, and a pressure gauge indicates a 5 bar (73 psi) operating pressure.

		PORTATA / CAPACITY ($\pm 5\%$)									
		COME SI ORDINA / HOW TO ORDER									
		60°									
		75.1816.4 LILLA LILAC	75.1816.1 MARRONE BROWN	75.1816.2 GIALLO YELLOW	75.1816.3 ARANCIO ORANGE	75.1816.5 ROSSO RED	75.1816.6 GRIGIO GREY	75.1816.7 VERDE GREEN	75.1816.8 NERO BLACK	75.1816.9 BLU BLUE	
		75.1802.91 BIANCO WHITE	75.1802.92 LILLA LILAC	75.1802.93 MARRONE BROWN	75.1802.94 GIALLO YELLOW	75.1802.95 ARANCIO ORANGE	75.1802.96 ROSSO RED	75.1802.99 GRIGIO GREY	75.1802.97 VERDE GREEN	75.1802.100 NERO BLACK	75.1802.98 BLU BLUE
PRESSIONE bar	PRESSURE psi	I/min	USGal/min	I/min	USGal/min	I/min	USGal/min	I/min	USGal/min	I/min	USGal/min
3	45	0.22	0.058	0.28	0.076	0.38	0.102	0.57	0.156	0.77	0.209
4	60	0.25	0.066	0.32	0.086	0.43	0.117	0.65	0.178	0.89	0.238
5	70	0.27	0.071	0.36	0.095	0.48	0.127	0.73	0.193	0.99	0.262
6	85	0.30	0.077	0.39	0.103	0.52	0.137	0.80	0.211	1.08	0.285
7	100	0.32	0.083	0.42	0.111	0.56	0.148	0.86	0.227	1.17	0.309
8	115	0.34	0.089	0.45	0.119	0.60	0.159	0.92	0.243	1.24	0.328
9	130	0.36	0.095	0.48	0.127	0.64	0.169	0.97	0.256	1.32	0.349
10	150	0.37	0.101	0.50	0.132	0.67	0.177	1.03	0.272	1.39	0.367
11	160	0.39	0.103	0.52	0.137	0.70	0.185	1.07	0.283	1.45	0.383
12	175	0.41	0.108	0.55	0.145	0.73	0.193	1.12	0.296	1.51	0.399
13	190	0.42	0.112	0.57	0.151	0.76	0.201	1.17	0.309	1.57	0.415
14	205	0.44	0.115	0.59	0.156	0.79	0.209	1.21	0.320	1.63	0.431
15	215	0.45	0.118	0.61	0.161	0.81	0.214	1.25	0.330	1.69	0.446
16	235	0.47	0.126	0.63	0.166	0.84	0.222	1.29	0.341	1.74	0.460
17	245	0.48	0.129	0.64	0.169	0.86	0.227	1.33	0.351	1.79	0.473
18	260	0.50	0.133	0.66	0.174	0.89	0.235	1.37	0.362	1.84	0.486
19	275	0.51	0.134	0.68	0.180	0.91	0.240	1.40	0.370	1.89	0.499
20	300	0.52	0.140	0.70	0.185	0.93	0.246	1.44	0.380	1.94	0.512
21	310	0.54	0.142	0.71	0.188	0.95	0.251	1.48	0.391	1.99	0.526
22	320	0.55	0.144	0.73	0.193	0.98	0.259	1.51	0.399	2.03	0.536
23	330	0.56	0.146	0.74	0.195	100	0.264	154	0.407	2.07	0.547
24	350	0.57	0.150	0.76	0.201	102	0.269	156	0.417	2.12	0.560
25	365	0.58	0.153	0.77	0.203	104	0.275	161	0.425	2.16	0.571

CORRISPONDENZA COLORI ATR 60° / 80° CON ATI 60° / 80° - COLOR MATCHING ATR 60° / 80° WITH ATI 60° / 80°											
ATI 60° ATI 80°	75.1817.8 VIOLA PURPLE	75.1817.1 75.1817.9 ROSA PINK	75.1817.2 75.1817.10 ARANCIO ORANGE	75.1817.3 75.1817.11 VERDE GREEN	75.1817.4 75.1817.12 GIALLO YELLOW	75.1817.5 75.1817.13 LILLA LILAC	75.1817.6 75.1817.14 BLU BLUE	75.1817.7 75.1817.16 ROSSO RED	75.1817.17 MARRONE BROWN		

Hollow cone 60° or 80° spray angle.

Core fits firmly inside the spray tip body.


60° models: reduced drift on the top part of the target.

Precision polished ceramic surfaces ensure perfect sealing and precise flowrate.

Use:

fungicide and insecticide applications on air blast sprayers and boom sprayers.

Recommended for orchards and vineyards.

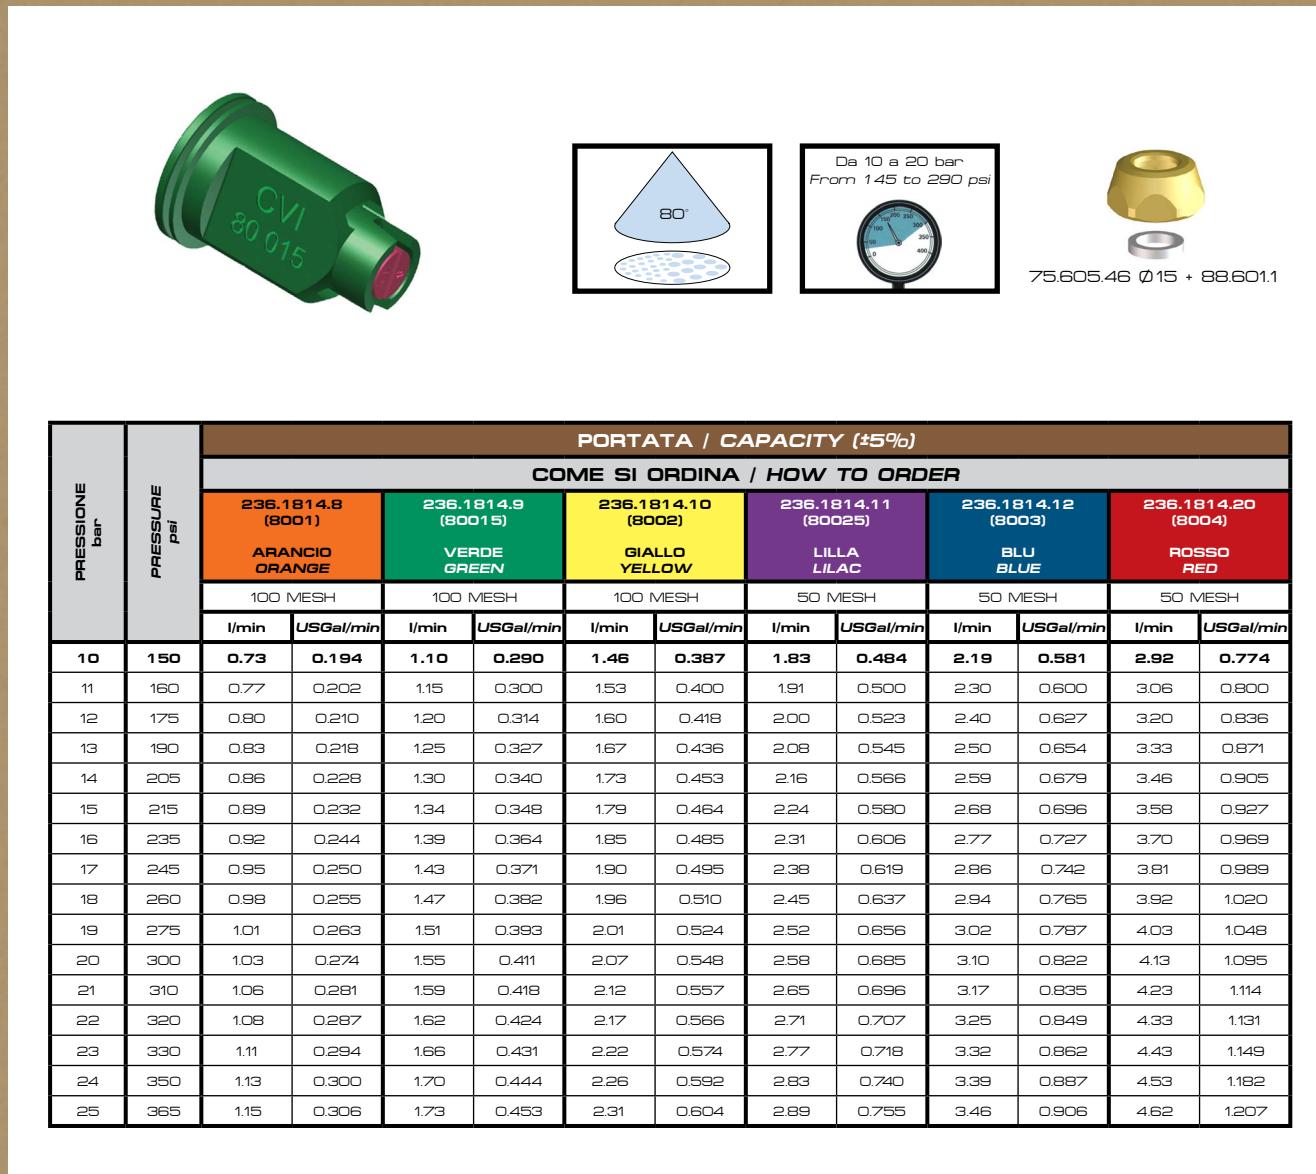

Air injection anti drift spray tip.

Anti-blocking design and double air-intake orifice.

Recommended operating pressure from 10 to 14 bar (145 to 200 psi).

Compact size (22 mm / 0.87" lenght).

Use:

application of systemic and contact chemicals on mist blowers.

For more information and quotations please contact:

- ✉ claudiacalzoni@braglia.it - Sales Department
- ✉ giorgiozecchini@braglia.it - Area Manager
- ✉ lucabraglia@braglia.it - Area Manager
- ✉ max@braglia.it - Area Manager
- ✉ stefanobraglia@braglia.it - Sales Manager