

[M283

SPECIFICATION

For wet booms. Three spray positions and shut off between each spray position. New check valve setting granting even operations. Shock resistant check valve to stand water hammers and heavy duty applications.

- *The most compact nozzle available* -


FEATURES

Max. operating pressure: 15 bar / 220 psi
Check valve opens at 1 bar/ 14.5 psi

Standard with assembled clamp, self tapping stainless steel screw, O Ring.
Clamp with seat for ISO M6 nut / screw.

VERSIONS

- with EPDM diaphragm
- with FKM diaphragm
- for 1/2" (Ø21.3 and Ø22 mm) and 3/4" pipes
- Ø7 or Ø9.5 mm pipe connection

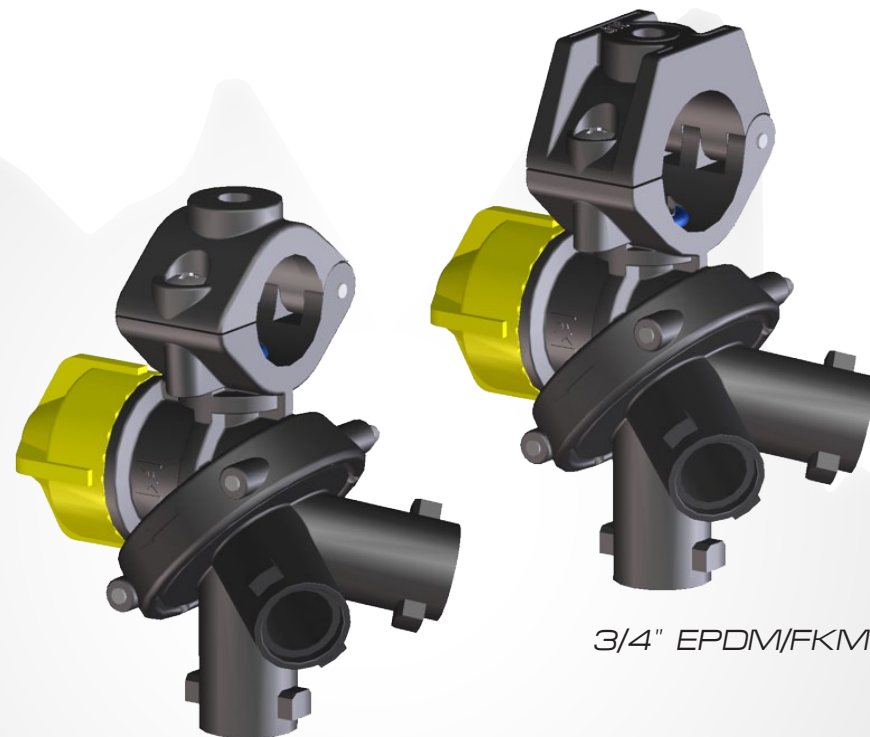

1/2" EPDM/FKM

3/4" EPDM/FKM

For information or offer please contact our Export Dept.:

Sales Department
claudiacalzoni@braglia.it

Area Managers:

- lucabraglia@braglia.it
- m.semeghini@braglia.it
- giorgiozecchini@braglia.it