




FILTRI - COMPONENTI STRAINERS - PARTS

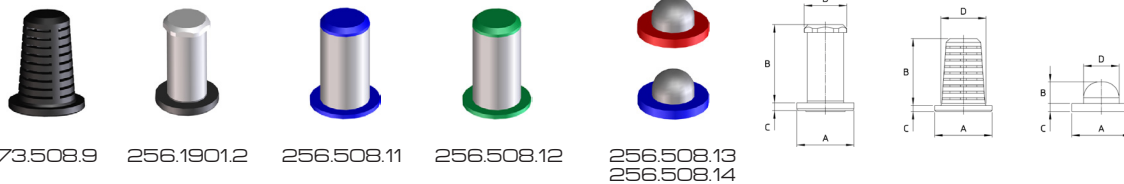

73.508.9

256.1901.2

256.508.11

256.508.12

256.508.13
256.508.14

◀ PAGE 40/47 ▶

COME SI ORDINA / HOW TO ORDER


CODICE code	VERSIONE model	MESH	MATERIALI materials	A mm	B mm	C mm	D mm	
73.508.9	A fessura Slotted	25 mesh	PA66	14.5	17	1.5	11.3	10
256.1901.2	Antigoccia Check valve	40 mesh	PA - NBR Acciaio inox PA - Buna N - Stainless steel	14.7	20	2	10.8	10
256.508.11 blu - blue	Filtro Strainer	50 mesh	PA - Acciaio inox PA - Stainless steel	15	19.3	2	11.5	10
256.508.12 verde - green	Filtro Strainer	100 mesh	PA - Acciaio inox PA - Stainless steel	15	19.3	2	11.5	10
256.508.13 rosso - red	A cupola Cup strainer	32 mesh	PA - Acciaio inox PA - Stainless steel	15	5.5	2	10	50
256.508.14 blu - blue	A cupola Cup strainer	50 mesh	PA - Acciaio inox PA - Stainless steel	15	5.5	2	10	50

RICAMBI SPARE PARTS :

256.1901.2



256.208.2



256.605.7



716.605.3



256.605.101



256.605.16

256.208.2
Pressione di esercizio max.: 40 bar
Peso: 26 g
Materiali: ottone nichelato

Max. operating pressure.: 40 bar (580 psi)
Weight: 26 g (0.9 oz)
Materials: nickel plated brass

256.605.7 - 716.605.3 - 256.605.101 - 256.605.16
Pressione di esercizio max.: 40 bar
Peso: 15 g
Materiali: ottone nichelato - ottone

Max. operating pressure.: 40 bar (580 psi)
Weight: 15 g (0.5 oz)
Materials: nickel plated brass - brass

COME SI ORDINA / HOW TO ORDER

CODICE code	A filettatura - thread	B filettatura - thread	C mm	D mm	
256.208.2	G1/4M. - 1/4" BSPM.	G3/8M. - 3/8" BSPM.	23	8	10
CODICE code	FILETTATURA thread	PER UGELLI for spray tips	Ø interno internal Ø	HEX mm	
256.605.7 716.605.3 256.605.101 256.605.16	G3/8F. - 3/8" BSPF.	Ø 15 AD/AC ALBUZ® - Disc & Cores Teejet® TX Teejet® AD/AC ALBUZ®	15.4 15.7 15.4 15.85	20 20 20 20	10 10 - 10



GETTI
NOZZLES



UGELLI
SPRAY TIPS



CATALOGHI
CATALOGUES