




KIT Ø18

ALBUZ
ITALIAN
EXCLUSIVE
DISTRIBUTOR

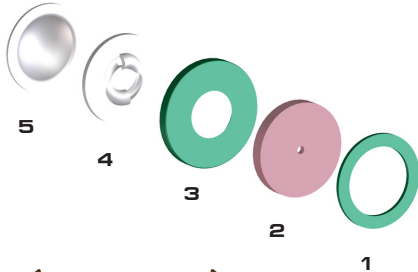

◀ PAGE 28/43 ▶

ATTENZIONE - IMPORTANTE
Coppia di serraggio ghiera: 9 Nm - 11 Nm

Disponibili ALBUZ® blister (10 kit)
COME SI ORDINA: BL + codice kit

Materiali: acciaio inox - allumina - materiali plastici
Impiego: su getti atomizzatori per trattamenti fungicidi ed insetticidi.
Confezioni da: 50 - 10 kit (blister)

WARNING - IMPORTANT NOTICE
Caps torque wrench setting: 9 - 11 Nm (6.6 - 8.1 lb ft)

ALBUZ® blister available (10 kits)
HOW TO ORDER: BL+ kit code

Materials: stainless steel - alumina - plastic materials
Use: fungicide and insecticide applications on air blast sprayers
Pieces per box: 50 - 10 kit (blister)



75.605.47 Ø18

Da 10 a 40 bar
From 150 to 600 psi



Convogliatore cieco
Blank core



Convogliatore forato
Drilled core

COME SI ORDINA / HOW TO ORDER			
	Ricambi Spare parts	Foro mm Hole mm	
1	70.601.37	-	10
2	70.1802.1	Ø 0.8	10
	70.1802.2	Ø 1.0	10
	70.1802.3	Ø 1.2	10
	70.1802.4	Ø 1.5	10
	70.1802.5	Ø 1.8	10
	70.1802.6	Ø 2.0	10
3	70.1802.25	Ø 2.3	10
	70.601.36	-	10
4	70.204.25	cieco / blank	10
	70.204.29	Ø 1.0	10
	70.204.26	Ø 1.2	10
	70.204.27	Ø 1.5	10
	70.204.28	Ø 1.8	10
	70.508.10	-	10

FILTRO STRAINER	COME SI ORDINA HOW TO ORDER			Pressione bar	Portata l/min.	Angolo di spruzzo Spray angle	Pressure psi	Flow rate USGai/min
	KIT	Ugello mm Spray tip mm	Foro convogliatore mm Core bore mm					
40 MESH	70.810.11	Ø 0.8	cieco blank	10	0.89	45°	150	0.24
				15	1.09	45°	220	0.29
				20	1.26	45°	300	0.34
				30	1.54	45°	450	0.41
	70.810.49	Ø 0.8	Ø 1.0	10	1.78	45°	600	0.48
				15	1.08	35°	150	0.29
				20	1.32	35°	220	0.35
				30	1.52	35°	300	0.41
	70.810.12	Ø 1.0	cieco blank	40	1.87	35°	450	0.50
				10	2.16	40°	600	0.58
				15	1.27	45°	150	0.34
				20	1.56	45°	220	0.41
	70.810.50	Ø 1.0	Ø 1.0	20	1.80	45°	300	0.48
				30	2.21	45°	450	0.59
				40	2.55	45°	600	0.68
				10	1.75	45°	150	0.47
	70.810.13	Ø 1.2	cieco blank	15	2.14	45°	220	0.57
				20	2.47	45°	300	0.66
				30	3.03	50°	450	0.81
				40	3.49	50°	600	0.94
70.810.51	Ø 1.2	Ø 1.0	10	1.49	50°	150	0.40	
			15	1.82	50°	220	0.48	
			20	2.10	55°	300	0.56	
			30	2.57	55°	450	0.69	
70.810.14	Ø 1.2	Ø 1.2	40	2.97	60°	600	0.80	
			10	2.37	50°	150	0.64	
			15	2.90	50°	220	0.77	
			20	3.35	55°	300	0.90	
70.810.15	Ø 1.2	Ø 1.0	30	4.10	55°	450	1.10	
			40	4.74	55°	600	1.27	
			10	2.41	45°	150	0.65	
			15	2.95	45°	220	0.78	
70.810.52	Ø 1.2	Ø 1.2	20	3.41	45°	300	0.92	
			30	4.17	40°	450	1.12	
			40	4.82	40°	600	1.29	
			10	2.25	60°	150	0.60	
70.810.16	Ø 1.5	cieco blank	15	2.75	60°	220	0.73	
			20	3.18	60°	300	0.85	
			30	3.88	60°	450	1.05	
			40	4.49	60°	600	1.21	
70.810.17	Ø 1.5	Ø 1.0	10	3.55	60°	150	0.95	
			15	4.35	60°	220	1.16	
			20	5.02	65°	300	1.35	
			30	6.15	65°	450	1.65	
70.810.18	Ø 1.5	Ø 1.2	40	7.10	65°	600	1.91	
			10	3.63	60°	150	0.97	
			15	4.44	60°	220	1.18	
			20	5.13	60°	300	1.38	
70.810.19	Ø 1.5	Ø 1.5	30	6.28	60°	450	1.69	
			40	7.25	60°	600	1.95	
			10	3.76	45°	150	1.01	
			15	4.61	50°	220	1.23	
70.810.20	Ø 1.5	Ø 1.5	20	5.32	50°	300	1.43	
			30	6.52	50°	450	1.75	
			40	7.53	50°	600	2.02	
			10	2.74	55°	150	0.74	
70.810.21	Ø 1.8	cieco blank	15	3.35	60°	220	0.89	
			20	3.87	60°	300	1.04	
			30	4.74	65°	450	1.27	
			40	5.47	65°	600	1.47	
70.810.22	Ø 1.8	Ø 1.8	10	4.90	55°	150	1.32	
			15	6.00	55°	220	1.59	
			20	6.93	55°	300	1.86	
			30	8.49	60°	450	2.28	
70.810.23	Ø 1.8	Ø 1.8	40	9.80	60°	600	2.63	
			10	5.14	50°	150	1.38	
			15	6.30	50°	220	1.67	
			20	7.27	55°	300	1.96	
70.810.24	Ø 1.8	Ø 1.8	30	8.91	55°	450	2.39	
			40	10.29	55°	600	2.77	
			10	3.05	65°	150	0.82	
			15	3.73	65°	220	0.99	
70.810.25	Ø 2.0	cieco blank	20	4.31	65°	300	1.16	
			30	5.28	70°	450	1.42	
			40	6.09	70°	600	1.64	
			10	6.04	50°	150	1.62	
70.810.26	Ø 2.0	Ø 1.8	15	7.40	55°	220	1.97	
			20	8.54	55°	300	2.30	
			30	10.47	60°	450	2.81	
			40	12.08	60°	600	3.25	



UGELLI
SPRAY TIPS



BLISTER



CATALOGHI
CATALOGUES