




ALBUZ[®] CVI OC 80°






ALBUZ
ITALIAN
EXCLUSIVE
DISTRIBUTOR



300.618.3 EPDM
300.618.4 FPM/FKM



◀ PAGE 13/43 ▶

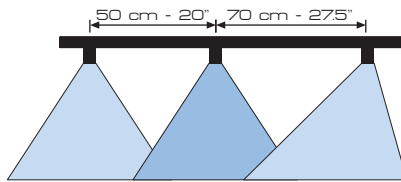

Da 15 a 30 bar
From 20 to 40 psi



Materiali: materiali plastici ad alta resistenza - allumina. **Impiego:** angolo di spruzzo 80° fuori centro (15° / 65°). Trattamenti con prodotti chimici sistemici, a contatto e fertilizzanti liquidi. Anti deriva ad iniezione d'aria. Dimensioni compatte (lunghezza 22 mm). Distribuzione eccellente in un ampio arco di pressioni. Migliora i risultati dei trattamenti nelle zone perimetrali. Pressione consigliata 2.0 bar. - **Confezioni da:** 50

Materials: high resistance plastic materials - Al₂O₃ alumina ceramic. **Use:** off center 80° (15° / 65°) spray angle. All applications including liquid fertilizers. Air injection anti drift flat fan spray tip. Compact size (22 mm / 0.87" length). Excellent spray distribution on a wide range of pressures. Spraying on field borders. 2.0 bar (30 psi) recommende operating pressure. **Pieces per box:** 50

FILTRO STRAINER	COME SI ORDINA HOW TO ORDER	bar	l/min	VELOCITÀ / SPEED km/h										
				9	10	12	14	16	18	20	22	24	26	
100 MESH	236.1814.21 (8002) GIALLO YELLOW	1.5	0.57	76	68	57	49	43	38	34	31	29	26	
		2.0	0.66	88	79	66	57	50	44	44	35	33	30	
		2.5	0.73	97	88	73	63	55	49	48	40	37	34	
		3.0	0.80	107	96	80	69	60	53	52	44	40	37	
50 MESH	236.1814.22 (80025) LILLA LILAC	1.5	0.71	95	85	71	61	53	47	35	39	36	33	
		2.0	0.82	109	98	82	70	62	55	49	45	41	38	
		2.5	0.91	121	109	91	78	68	61	55	50	46	42	
		3.0	1.00	133	120	100	86	75	67	60	55	50	46	
50 MESH	236.1814.23 (8003) BLU BLUE	1.5	0.85	113	102	85	73	64	57	51	46	43	39	
		2.0	0.98	131	118	98	84	74	65	66	53	49	45	
		2.5	1.10	147	132	110	94	83	73	72	60	55	51	
		3.0	1.20	160	144	120	103	90	80	78	65	60	55	

