




KIT Ø30

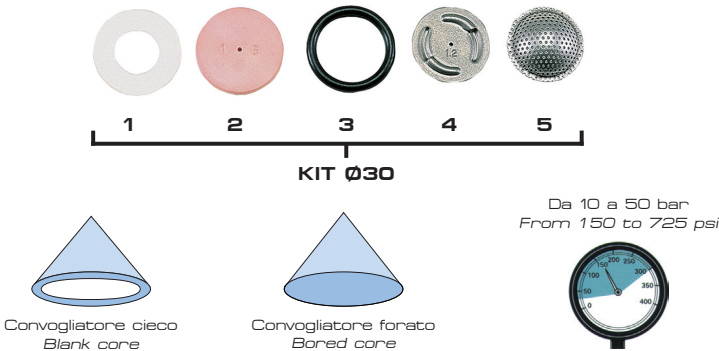

Materiali: acciaio inox - allumina - NBR - materiali plastici ad alta resistenza
Impiego: su M87 / M77 per trattamenti fungicidi ed insetticidi.
Materials: stainless steel - ceramic - Buna N - high resistance plastic materials
Use: fungicide and insecticide applications on M87 / M77 nozzle.

COME SI ORDINA HOW TO ORDER			
	Ricambi Spare parts	Foro mm Hole mm	
1	71.601.9	-	10
2	71.1802.63	Ø0.8	10
	71.1802.34	Ø1.0	10
	71.1802.35	Ø1.2	10
	71.1802.36	Ø1.5	10
	71.1802.37	Ø1.8	10
	71.1802.64	Ø2.0	10
3	77.602.41	-	10
4	71.204.8	cieco / blank	10
	71.204.3	Ø1.2	10
	71.204.4	Ø1.5	10
	71.204.5	Ø1.8	10
5	71.203.3	-	10

COME SI ORDINA HOW TO ORDER			Pressione bar	Portata l/min.	Angolo di spruzzo Spray angle	Pressure psi	Flow rate USGal/min	
KIT	Foro ugello Tip hole mm	Convogliatore Core hole mm						
71.810.35	Ø0.8	cieco blank	10	0.95	30°	150	0.26	100
			20	1.18	30°	300	0.32	
			30	1.41	35°	450	0.39	
			40	1.65	35°	600	0.45	
71.810.36	Ø1.0	cieco blank	10	1.15	45°	150	0.31	100
			20	1.40	45°	300	0.38	
			30	1.65	50°	450	0.45	
			40	1.88	50°	600	0.51	
71.810.37	Ø1.2	cieco blank	10	1.45	50°	150	0.40	100
			20	1.78	60°	300	0.49	
			30	2.11	60°	450	0.58	
			40	2.45	60°	600	0.67	
71.810.38	Ø1.2	Ø1.2	10	2.20	45°	150	0.58	100
			20	3.10	45°	300	0.83	
			30	3.80	50°	450	1.05	
			40	4.50	50°	600	1.20	
71.810.39	Ø1.5	cieco blank	10	1.75	50°	150	0.47	100
			20	2.45	60°	300	0.66	
			30	3.00	60°	450	0.80	
			40	3.50	60°	600	0.93	
71.810.40	Ø1.5	Ø1.2	10	3.60	45°	150	0.98	100
			20	4.48	45°	300	1.22	
			30	5.35	50°	450	1.46	
			40	6.25	50°	600	1.71	
71.810.41	Ø1.5	Ø1.5	10	3.75	40°	150	1.00	100
			20	5.30	40°	300	1.43	
			30	6.50	45°	450	1.72	
			40	7.50	45°	600	2.00	
71.810.42	Ø1.8	cieco blank	10	2.20	45°	150	0.60	100
			20	3.10	50°	300	0.82	
			30	3.80	50°	450	1.00	
			40	4.50	50°	600	1.20	
71.810.43	Ø1.8	Ø1.5	10	4.95	50°	150	1.32	100
			20	7.00	50°	300	1.80	
			30	8.60	55°	450	2.20	
			40	9.90	55°	600	2.60	
71.810.44	Ø1.8	Ø1.8	10	5.10	40°	150	1.35	100
			20	7.20	40°	300	1.90	
			30	8.80	45°	450	2.35	
			40	10.20	45°	600	2.70	
71.810.45	Ø2.0	cieco blank	10	2.60	45°	150	0.70	100
			20	3.70	50°	300	0.98	
			30	4.50	50°	450	1.20	
			40	5.20	50°	600	1.38	
71.810.46	Ø2.0	Ø1.8	10	6.10	45°	150	1.65	100
			20	7.85	45°	300	2.13	
			30	9.65	50°	450	2.65	
			40	11.50	50°	600	3.15	