
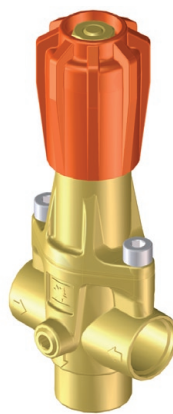




## M410 - M411

410.1510.2  
411.1510.4410.1510.1  
411.1510.3**Standard completi di tappo G1/4M. - senza manometro**

Portata max. scarico: 180 l/min  
Peso: 1.2 kg

**Materiali:** ottone - acciaio inox - pistone e sede valvola in acciaio inox con rivestimento anti usura - tenute in NBR - materiali plastici ad alta resistenza

**Impiego:** su atomizzatori, gruppi irroranti e macchine per il trattamento a tutto campo. Regolazione della pressione con by pass del liquido in eccesso. Utilizzabili anche come valvole di massima pressione e sovra pressione. La qualità dei materiali impiegati garantiscono resistenza e durata. Installare in derivazione sulla linea di mandata.

**Standard with 1/4" BSPM. Plug - pressure gauge not supplied**

By pass max. Output: 180 l/min - 48 USGal/min  
Weight: 1.2 kg / 2.6 lb

**Materials:** brass - stainless steel - piston and valve seat with wear proof coating - Buna N seals - high resistance plastic materials

**Use:** on boom and air blast sprayers. Pressure adjustment by passing excess liquid. Used also for pressure relief. Accurate pressure adjusting. Wear and damage proof. For correct use, install as shown.

**COME SI ORDINA / HOW TO ORDER**

CODICE code	PRESSIONE pressure	A	B	C mm	KIT RICAMBIO spare parts kit	
410.1510.1	25 BAR - 360 psi	G3/4F - 3/4BSPF	G3/4F - 3/4BSPF	182	410.302.36	5
410.1510.2	60 BAR - 870 psi	G3/4F - 3/4BSPF	G3/4F - 3/4BSPF	182	410.302.36	5
411.1510.3	25 BAR - 360 psi	G3/4F - 3/4BSPF	G1M-1" BSPM.	182	410.302.36	5
411.1510.4	60 BAR - 870 psi	G3/4F - 3/4BSPF	G1M-1" BSPM.	182	410.302.36	5

