




# KIT REGOLATORE M75 M75 SPRAY ADJUST KIT

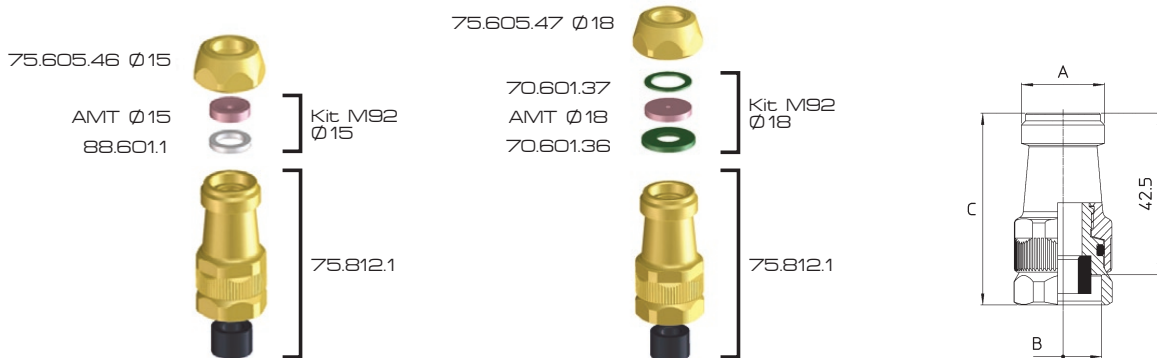

### Standard con guarnizione di tenuta. Ghiere e kit M92 Ø15/Ø18 non compresi

Pressione di esercizio max.: 40 bar  
Peso: 100 g

**Materiali:** ottone - tenute in NBR e FPM

**Impiego:** kit di regolazione dell'angolo di spruzzo e della gittata. Per trasformare i getti M70 / M75 / M76 / M90 Ø15 e Ø18 in getti con lato regolabile utilizzando le ghiera e gli ugelli eventualmente forniti in dotazione al getto.

**Avvitare il kit a battuta senza collanti sulla filettatura M22x1.5.** È compatibile con tutti gli ugelli AMT Ø15 e Ø18. Se necessario, sono configurabili con i Kit ugello M92 Ø15 e Ø18.

### Standard with seal. Caps and Ø15/Ø18 M92 kit not included

Max. operating pressure: 40 bar - 580 psi  
Weight: 100 g - 3.5 oz

**Materials:** brass - Buna N and FKM seals

**Use:** spray angle and throw adjusting kit. To convert Ø15 and Ø18 M70 / M75 / M76 nozzles into adjustable nozzles.

**Screw the kit flush over the M22x1.5 nozzle no sealant required thread.**

Compatible with all AMT Ø15 and Ø18 spray discs. If required, can be equipped with M92 Ø15 and Ø18 spray tip kits.

## COME SI ORDINA / HOW TO ORDER

CODICE code	A	B	C	
75.812.1	M22x1.5	M22x1.5	50.5	10



UGELLI  
TIPS

PAGE  
122-123